



SITE PLAN SHOWING THE PROPOSED CONSTRUCTION OF 2 NOS OF SFO QTRS AND 8 NOS OF FIREMEN QUARTERS AT SURVEY NO.418/1, WARD NO.2, BLOCK-7, NORTH CAR STREET, BODINAYAKANUR, BODINAYAKANUR TALUK, THENI DISTRICT.

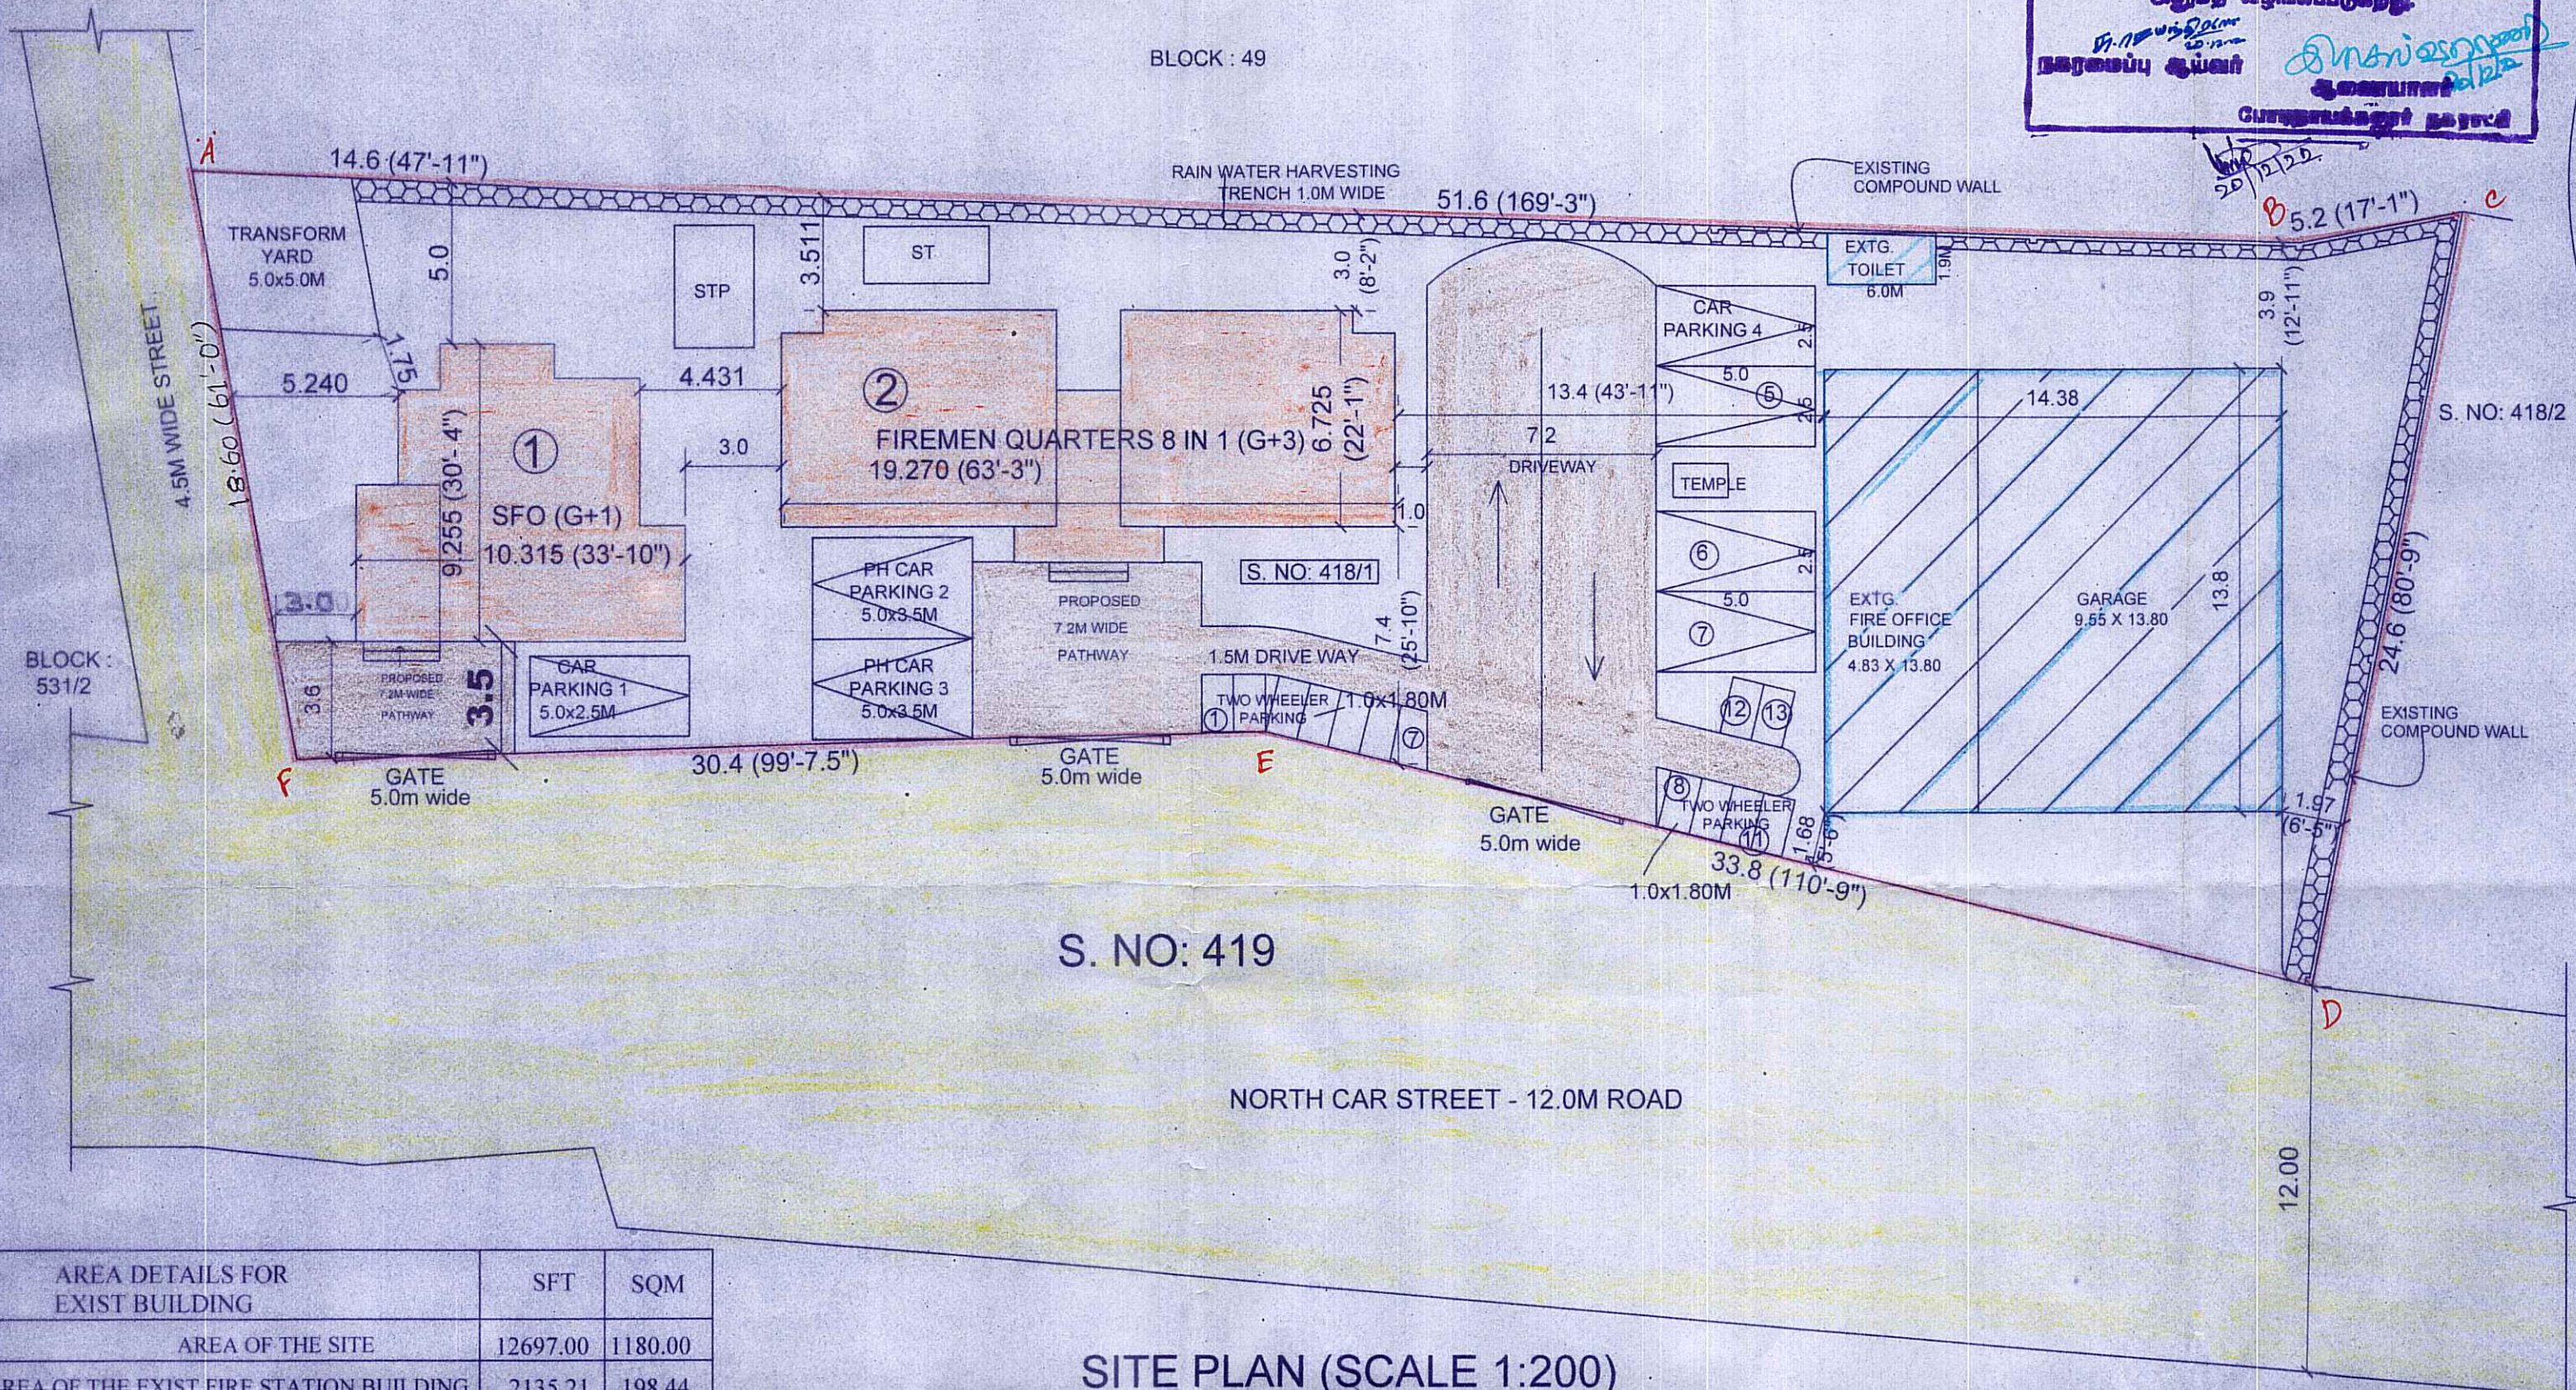

பொதுநாயக்கரை நகராட்சி  
ச. வி. எண்: 749 / 2022 / ப் 1 நாள் 20.12.2022  
உத்தரவு குடியிருப்பு/குடியிருப்பினர் கட்டிடம்  
விதிமுறைக்குட்பட்டிருக்கின்ற கட்டிடம்  
அனுமதி வழங்கப்படுகிறது.  
நகரமப்பு ஆய்வர்  
சுயநிர்வாகி  
சுயநிர்வாகி

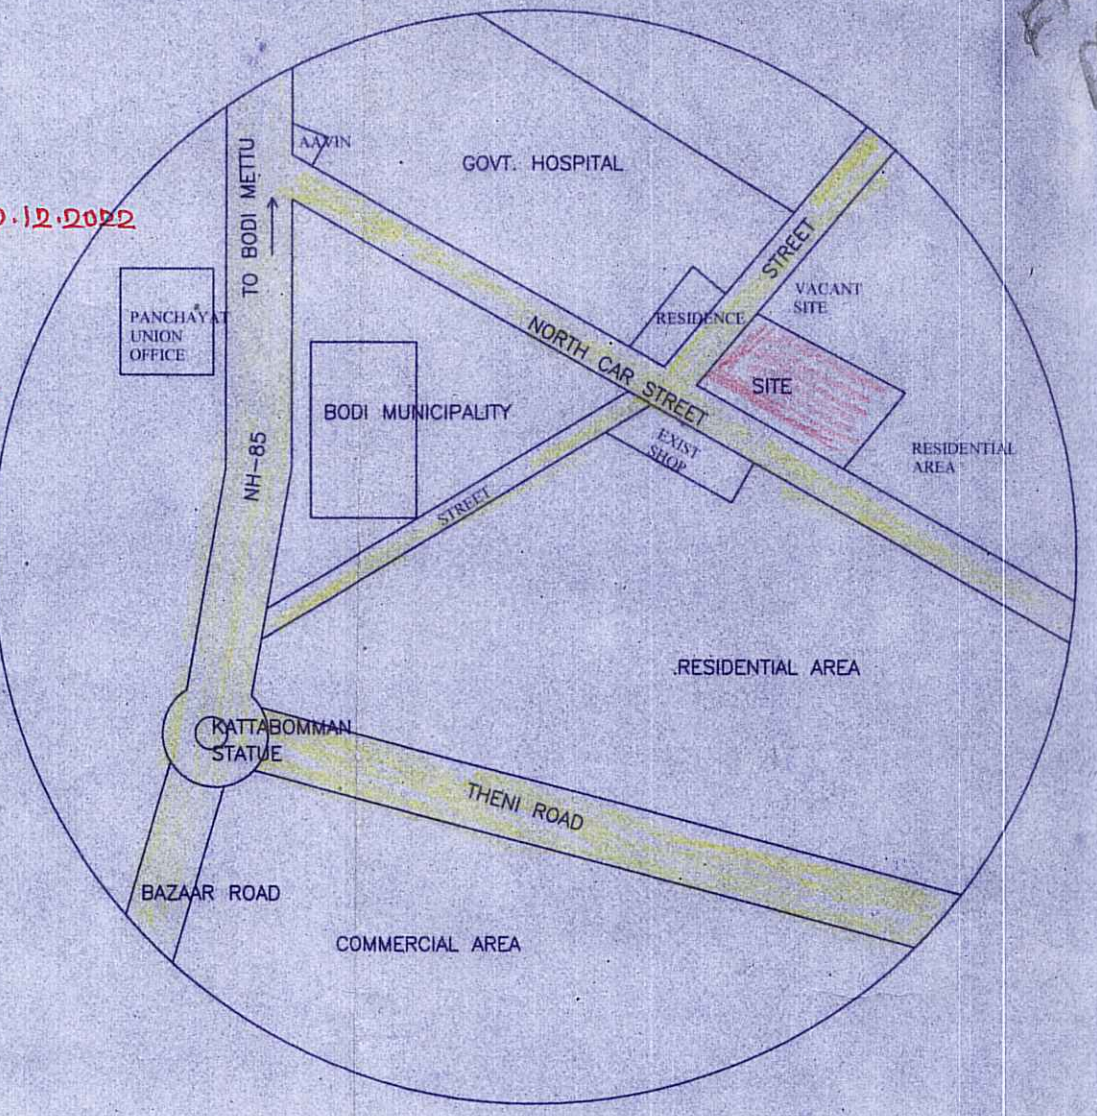

KEY PLAN (NOT TO SCALE)

S. NO: 419

NORTH CAR STREET - 12.0M ROAD

SITE PLAN (SCALE 1:200)

மனை ஒப்புதல் / கட்டிட அனுமதி  
நகர் ஊரமைப்பு உதவி இயக்குநர் தேனி மாவட்டம்  
நடவடிக்கை ந.க.எண்: 1362 / 2022 தே.மா.2  
நாள் 02.12.2022 உத்தரவில் கண்டுள்ளவாறு  
மனையிடத்திற்கு 'A' முதல் 'F' வரை என்.  
எல்லையிட்டு மனை ஒப்புதலும், கட்டிட வரைபடத்திற்கு  
க.வ./ந.ஊ.உ.இ. (தே.மா) எண் 25/2022 என  
எண்ணிடப்பட்டு சிறப்பு நிபந்தனைகள் மற்றும்  
நிபந்தனைகளுடன் ஒதுக்கீடு செய்யப்படுகிறது.

உதவி இயக்குநர்  
நகர் ஊரமைப்பு அலுவலகம்  
தேனி மாவட்டம்  
02/12/22

AREA DETAILS FOR EXIST BUILDING	SFT	SQM
AREA OF THE SITE	12697.00	1180.00
AREA OF THE EXIST FIRE STATION BUILDING	2135.21	198.44
AREA OF THE EXIST TOILET	122.66	11.40
TOTAL AREA	2257.87	209.84
FSI FOR EXIST BUILDING: 0.178	PLOT COVERAGE : 17.78%	
AREA DETAILS FOR PROPOSED BUILDING	SFT	SQM
AREA OF BLOCK-1 (GF)	826.91	76.85
AREA OF BLOCK-1 (FF)	826.91	76.85
AREA OF BLOCK-1 (HEAD ROOM)	149.56	13.90
AREA OF BLOCK-2 (GF)	1372.22	127.53
AREA OF BLOCK-2 (FF)	1372.22	127.53
AREA OF BLOCK-2 (SF)	1372.22	127.53
AREA OF BLOCK-2 (TF)	1372.22	127.53
AREA OF BLOCK-2 (HEAD ROOM)	138.37	12.86
FSI FOR PROPOSED BUILDING : 0.563	PLOT COVERAGE : 17.32%	
TOTAL FSI FOR EXIST & PROPOSED BUILDING : 0.741	PLOT COVERAGE : 35.10 %	

PARAMETER	REQUIRED	PROVIDED	BLOCK NO.	QTRS. TYPE	NO OF BLOCKS	NO OF QTRS.	NO.OF FLOORS
CARPARKING	7.0	7.0	①	SFO	1	2	G+1
TWO WHEELER PARKING	9.0	13.0	②	FIREMEN QTRS.	1	8	G+3
VEHICULAR DRIVEWAY	7.2	7.2					
REFERENCE							
SITE BOUNDARY							
PROPOSED BUILDING							
EXIST BUILDING							
PROPOSED DRIVEWAY & PATHWAY							
EXIST ROAD							
TOTAL	2	10					

ALL DIMENSIONS ARE IN 'M', FEET AND INCHES UNLESS OTHERWISE SPECIFICALLY STATED

APPLICANT

தமிழ்நாடு தீயணைப்பு மீட்பு பணிகள் குறை  
தேனி மாவட்டம், தேனி

ENGINEER

EXECUTIVE ENGINEER  
TNPHC  
MADURAI DIVISION

SCALE  
1 : 200

Dr. No.  
Lo/759/2022

TAMILNADU POLICE HOUSING CORPORATION LIMITED

NO:132, E.V.R.SALAI, KILPAUK, CHENNAI - 600 010