



PLAN SHOWING THE PROPOSED CONSTRUCTION OF DISTRICT OFFICE BUILDING FOR TAMILNADU POLLUTION CONTROL BOARD AT SURVEY NO.1218/2 & 1219/2, VADAVEERANAICKENPATTI VILLAGE, PERIYAKULAM TALUK, THENI DISTRICT.

APPLICANT: DISTRICT ENVIRONMENTAL ENGINEER,
TAMILNADU POLLUTION CONTROL BOARD,
THENI DISTRICT.

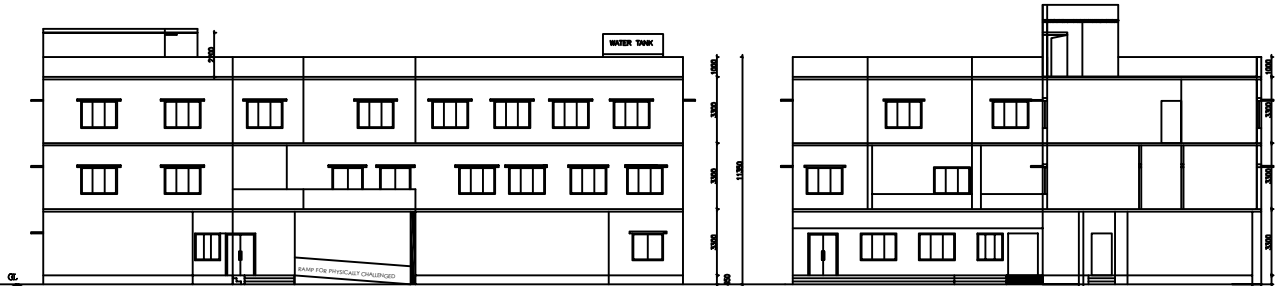



FRONT ELEVATION (TENTATIVE) SECTION -AA

SHEET NO.1		
SCHEDULE OF JOINERY		
TYPE	DESCRIPTION	SIZE
M0	MAIN DOOR T.B FRAME WITH TEAK WOOD SHUTTER	2100X2100
D1	DOOR	1500X2100
D2	DOOR	1000X2100
D3	DOOR	700X2100
D4	PULL CHALLENGED DOOR	1200X2100
D5	TERRACE DOOR	1000X2100
W1	WINDOW	1800X1350
W2	WINDOW	1500X1350
W3	WINDOW	1300X1350
V	VENTILATOR	1200X 800
V1	VENTILATOR	800X 800
V2	VENTILATOR	400X 800
W4	SLUR WINDOW	1800X2000
C0	COLLAPSIBLE GATE	1800X2100
L0	LIFT DOOR	1200X2000
SPECIFICATION		
FOUNDATION : COLUMN/BRICK		
SUPERSTRUCTURE : BRICK WORK IN CM 1:5		
ROOF : R.C.C SLAB WITH SUITABLE REINFORCEMENT AND PROTECTED WITH PRESSED TILES. MILD SLOPE OF (1:80) TO BE PROVIDED.		
JOINERY : UPVC		
FLOORING : VITRIFIED TILE FLOORING FOR ALL ROOMS. ANTISKID CERAMIC TILE FLOORING FOR BATH & WC WITH GLAZED TILES TO THE HEIGHT OF 1.5M		
PAINTING : INNER-COAT WITH ONE COAT OF PRIMER OUTER-PLASTIC EMULSION PAINT WITH ONE COAT OF PRIMER 1:100% TANK		
O.H.T		

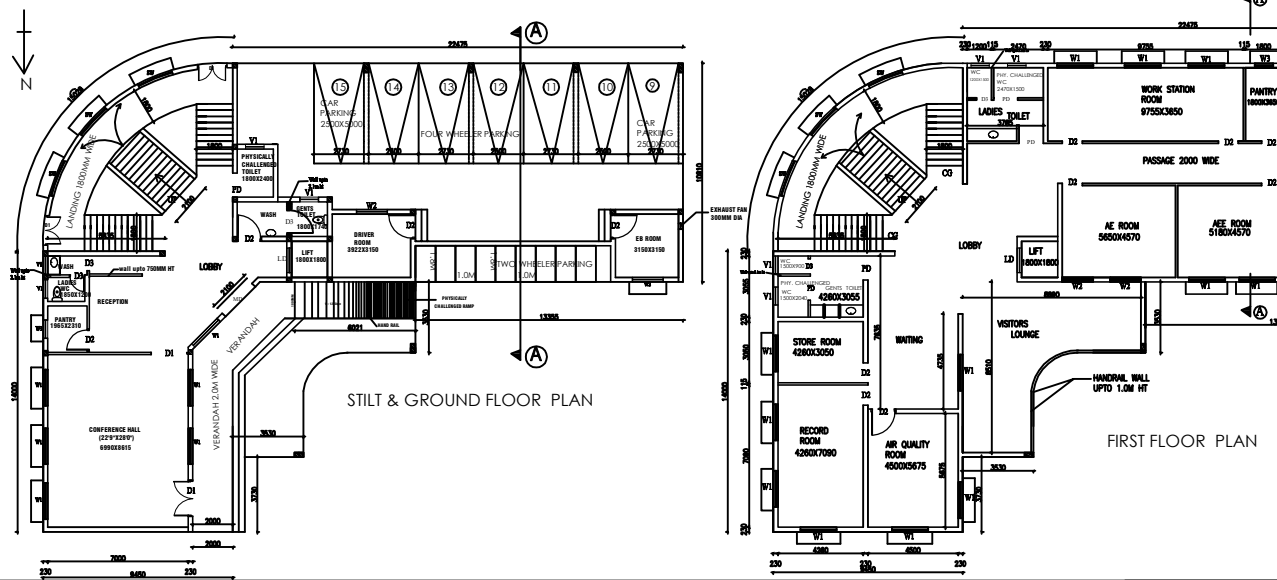

STILT & GROUND FLOOR PLAN FIRST FLOOR PLAN



SHEET NO.2		
SCALE:1:100		
APPLICANT		
ASSISTANT ENGINEER TAMILNADU POLICE HOUSING CORPORATION MADRAS DIVISION		

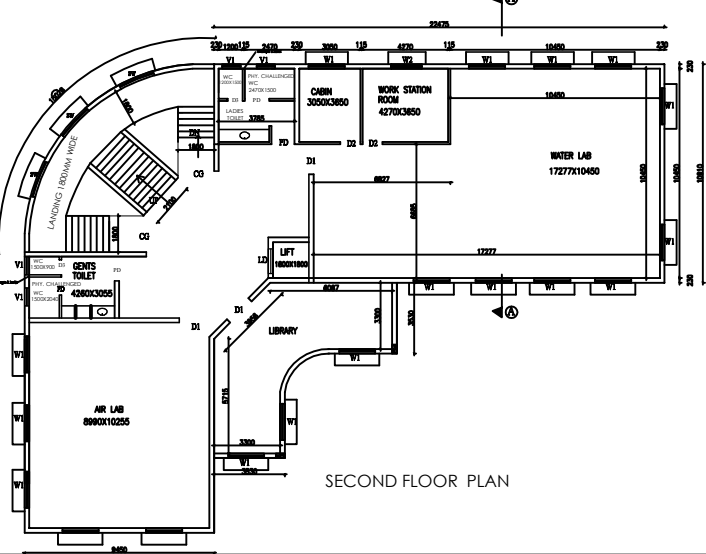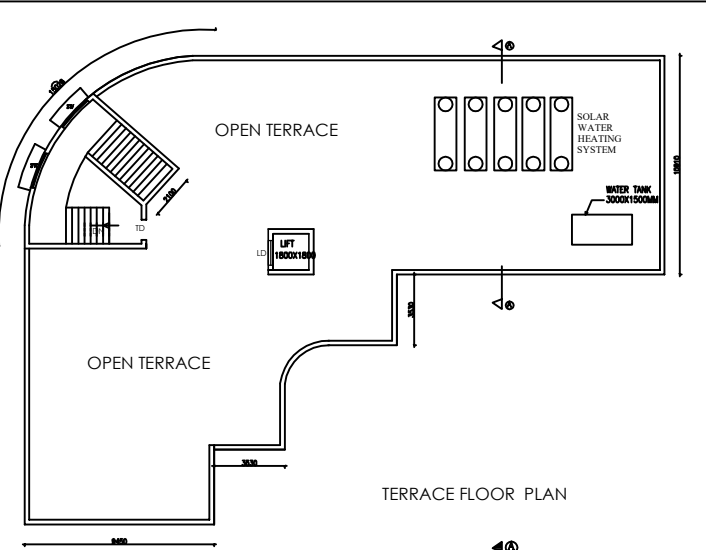

SECOND FLOOR PLAN

PLAN SHOWING THE PROPOSED CONSTRUCTION OF DISTRICT OFFICE BUILDING FOR TAMILNADU POLLUTION CONTROL BOARD AT SURVEY NO.1218/2 & 1219/2, VADAVEERANAICKENPATTI VILLAGE, PERIYAKULAM TALUK, THENI DISTRICT.

APPLICANT: DISTRICT ENVIRONMENTAL ENGINEER,
TAMILNADU POLLUTION CONTROL BOARD,
THENI DISTRICT.

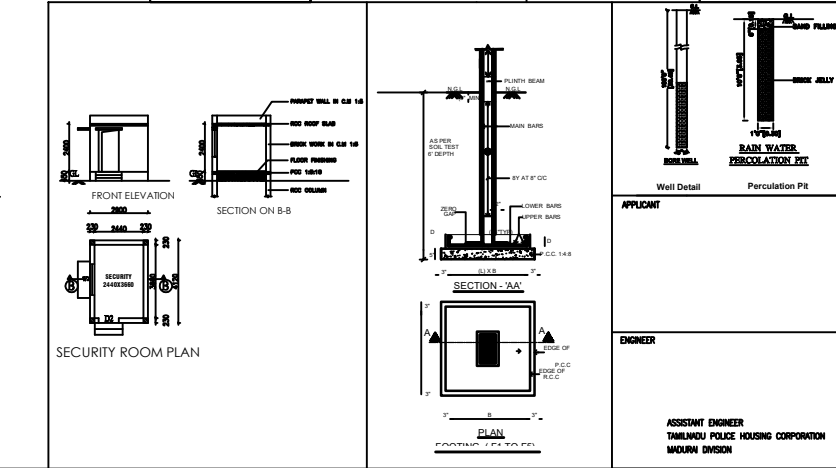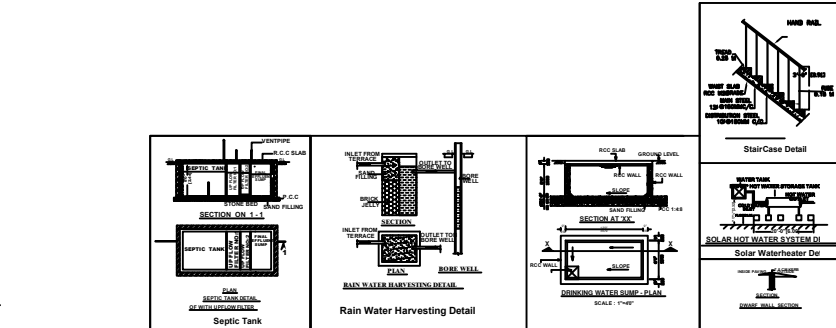

SECURITY ROOM PLAN SECTION -AA Well Detail

APPLICANT	ENGINEER	ASSISTANT ENGINEER TAMILNADU POLICE HOUSING CORPORATION MADRAS DIVISION
-----------	----------	---